


LF-GMD035YN

SELV Programmable AC120-277V 0-10V Dimmable LED Driver

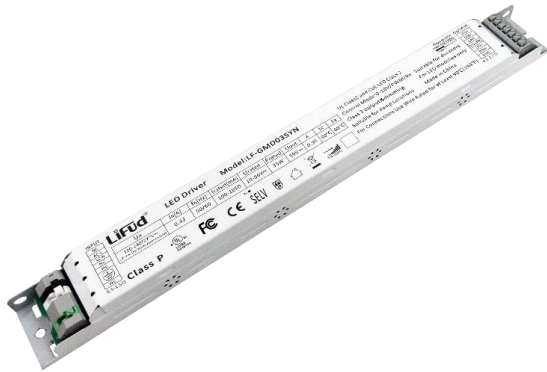

Product family features

- 0-10V/PWM/Rx 3-in-1 dimmable
- Dimming range: 0-100%
- Output voltage range: 10-56V
- Output current range: 100-1050mA
- Suitable for Class I light fixtures
- 5 years guarantee
- Lifetime up to 100,000h

Product family benefits

- Luminaire temperature guard via external NTC resistor
- Supports CLO function
- Output current adjustable and parameters configurable via Lifud programmer
- Logarithmic or linear dimming curve optional
- According to Zhaga Book13
- High AUX output: DC12V 200mA
- Isolated; flicker free
- Protective features: open circuit, short circuit, overload, over-temperature protection

Typical applications

- For linear lights and tri-proof lights
- For commercial, office and decorative lighting

Product parameters

- | | |
|-----------------------------|---------------------------|
| — Output current 100-1050mA | — Output voltage 10-56Vdc |
| — Output power 5.6-35W | — Efficiency 84% |
| — Input voltage 108-305Vac | |

Electrical data

Input data

Rated input voltage	120 ... 277V		
AC voltage range	108 ... 305V		
Mains frequency	50/60Hz		
Power factor	≥0.95/120V	≥0.95/230V	≥0.89/277V
Efficiency in max. power (without AUX)	≥84%/120V	≥85%/230V	≥86%/277V
THD	<10%		
Input current	0.42A Max/120V	0.19A Max/230V	0.17A Max/277V
Inrush current	14A 150us/120V	26A 150us/230V	32A 150us/277V
Loading number on circuit breaker 10 A (B)	16	29	25
Loading number on circuit breaker 10 A (C)	16	35	41
Loading number on circuit breaker 16 A (B)	26	47	40
Loading number on circuit breaker 16 A (C)	26	56	66
Protective conductor current	≤3.5mA		
Stand-by power consumption	<1W (dims to off)		

Output data

Nominal output voltage	10... 56V
Nominal output current	100...1050mA
Default output current	1050mA
Current setting	Lifud programmer
Maximum output power	35W
Nominal output power	5.6... 35W
Output current tolerance	±5% ¹⁾
Dimming depth	1%
Output ripple current (100 Hz)	±3.3 %
Flicker	According to IEEE Std 1789-2015
CIE SVM	≤0.4
IEC-Pst	≤1
Temperature tolerance	±3%
Start-up time (NOT connected with the dimmer)	<1.2S
Output type	Class 2
Nominal output voltage of 12V AUX	12V±1V
Nominal output current of 12V AUX	200mA
Ripple voltage of 12V AUX	<200mV


Safety

Withstanding voltage	I/P-O/P: 3.75kV&5mA&60S; I/P-PE: 1.5KVac&5mA&60S; O/P-PE: 0.5KVac&5mA&60S
Surge capability	L-N: 2.5 kV ; L/N-PE: 2.5 kV
Insulation resistance	I/P-O/P: >100MΩ@500VDC; I/P-P/E: >100MΩ@500VDC; O/P-PE: >100MΩ@500VDC
Ring wave	2.5kV
Lifetime	Up to 100,000 hours ²⁾
Guarantee	5 years ³⁾


- 1) $\pm 10\%$ @100-300mA
- 2) For details, please refer to the service life table
- 3) 5 years@ $T_c \leq 75^\circ\text{C}$

Characteristic diagrams


Operating Window

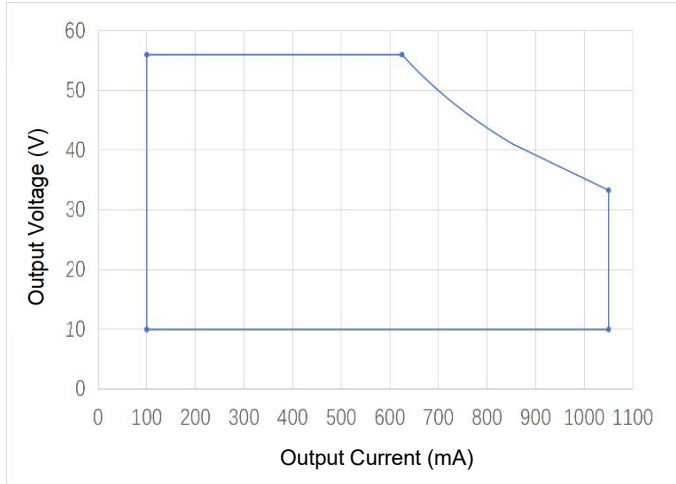


Typical Efficiency vs Load

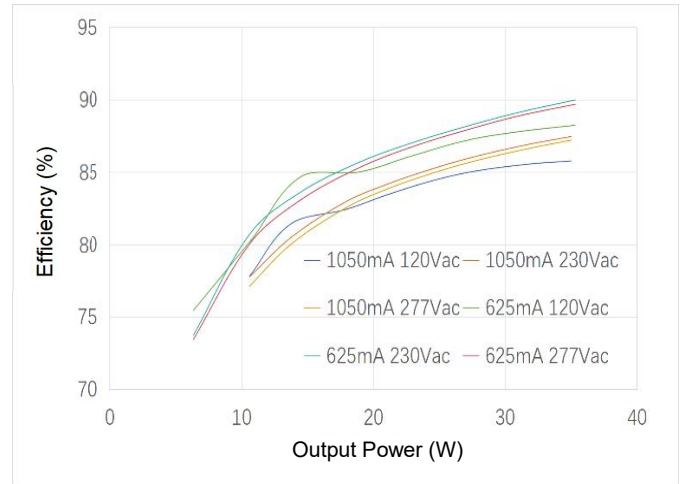


Typical Power Factor vs Load

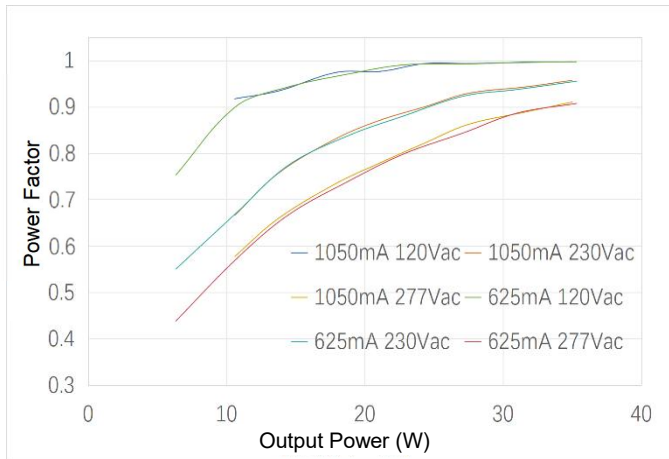

Typical THD vs Load

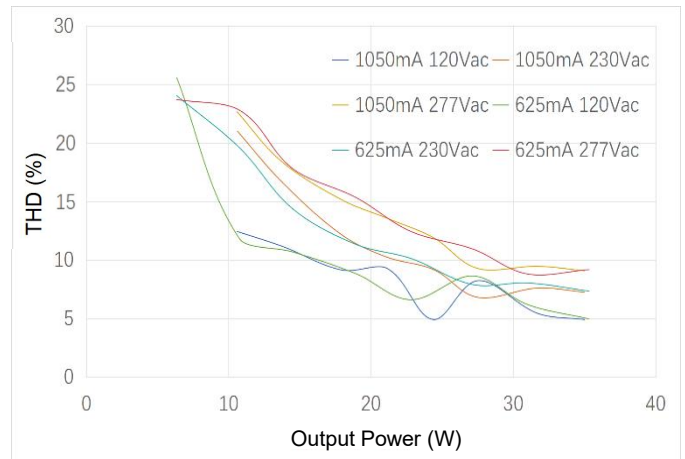

Lifespan

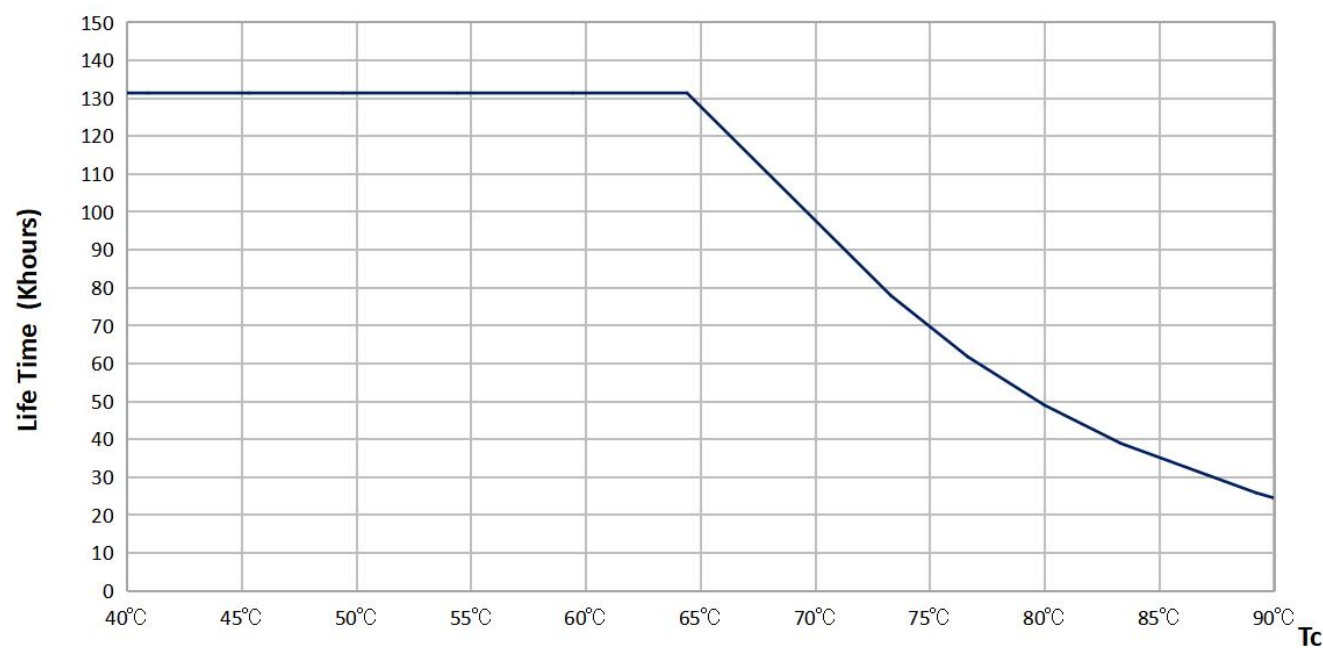



Service life

Model	Iout	Pout	Ta	50°C	60°C
LF-GMD035YN	1050mA	35W	Tc	65°C	75°C
			Lifetime	>100,000h	>50,000h

Note: The design life of the LED driver is as described above under reference conditions. The failure probability is less than 10%.

The relationship between Tc and Ta also depends on the design of the luminaire.

Dimensions (Unit: mm, deviation: ±0.2)

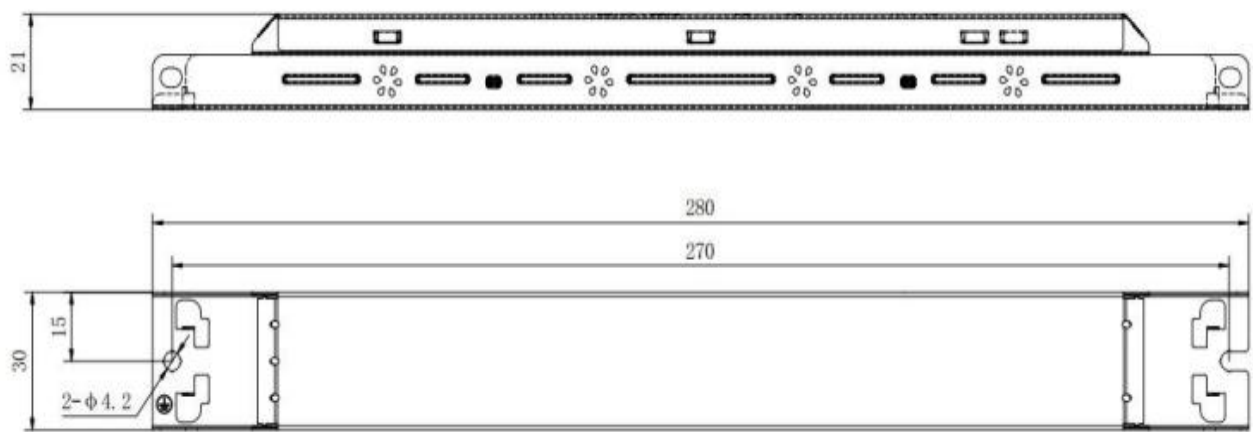

Mounting hole spacing, length	270mm
Product weight	194g
Cable cross-section, input side	0.5 ... 1.5 mm ²
Cable cross-section, output side	0.5 ... 1.5 mm ²
Wire preparation length, input side	7 ... 8mm
Wire preparation length, output side	7 ... 8mm
Length	280mm
Width	30mm
Height	21mm

Colors & materials

Casing material	Color coated sheet
Casing color	White

Temperature & operating conditions

Ambient temperature range	-30°C - +60°C
Maximum temperature at tc test point	80°C
Temperature range at storage	-30°C - +80°C (6 months in Class I environment)
Humidity range at storage	20-75%RH (no condensation)
Humidity during operation	20-95%RH (no condensation)
Atmospheric pressure	86-106KPa
RoHS	RoHS 2.0 (EU) 2015/863

Tc test point (Unit: mm)



Tc point is at the top of LED driver

Product terminal

Input		Output	
NC	/	LED+	Positive terminal output of LED driver
AC-L	AC live wire input	LED-	Negative terminal output of LED driver
AC-N	AC neutral wire input	GND	Negative terminal of NTC input/12V output
NC	/	NTC+/PRG	Positive terminal input of NTC


NC	/	12V+	Positive terminal output of 12V
	Earth wire	DIM+	Positive terminal output of dimming
NC	/	DIM-	Negative terminal output of dimming

Capabilities


Dimmable	0-10V/PWM/Rx
Dimming range	0...100%
Overload protection	Yes
Short circuit protection	Hiccup mode (Automatic reversible)
No-load protection	<59V
Over-temperature protection	Yes
Suitable for fixtures with prot. class	I
Programming interface	12V+/PRG/GND
Control interface	0-10V/PWM/Rx
Number of channels	1 channel

Dimming function instructions

- 0-10V dimming function

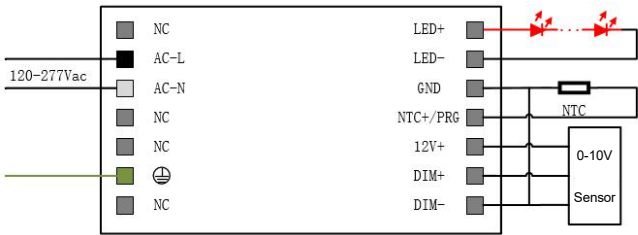

Wiring diagram of 0-10V sensor

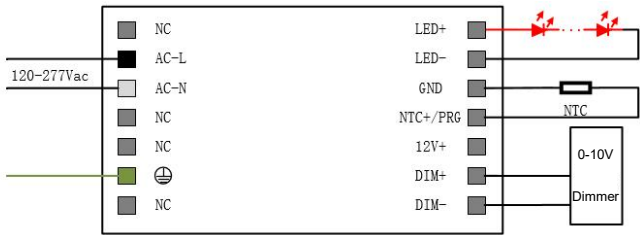


Wiring diagram of 0-10V dimmer


- 0-10V dimming instruction

- ① Connect 0-10V signal to DIM terminal
- ② In 0-10V dimming mode, when the input voltage is $1.2V \pm 0.1V$, the light turns on. When it's $1V \pm 0.1V$, the light turns off
- ③ Dimming depth: 1% (max. current)
- ④ DIM+/- (without signal connected): 100% rated current output


• 0-10V dim-to-off curve

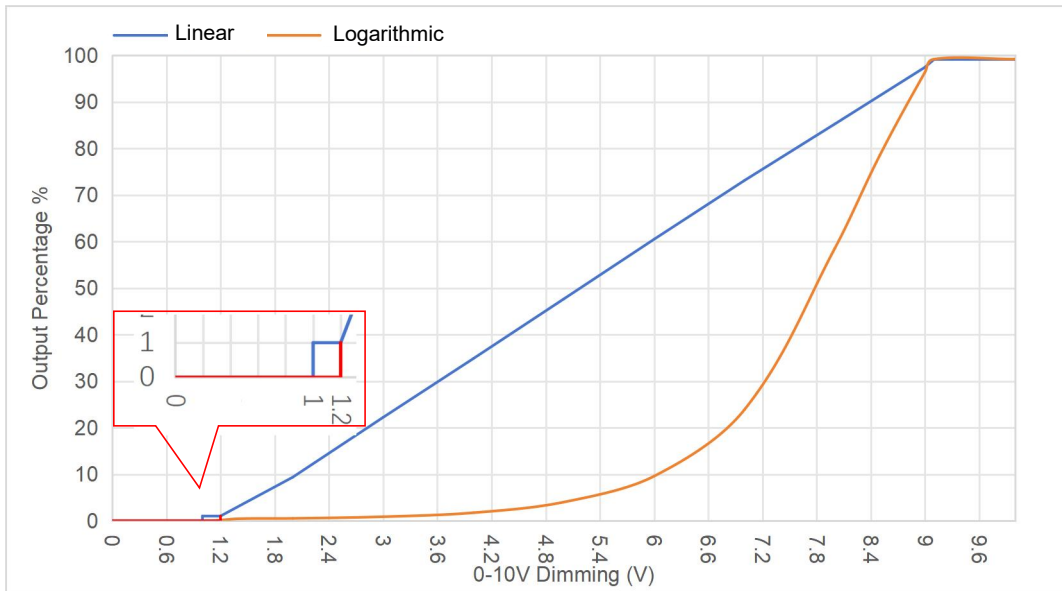

• PWM dimming function

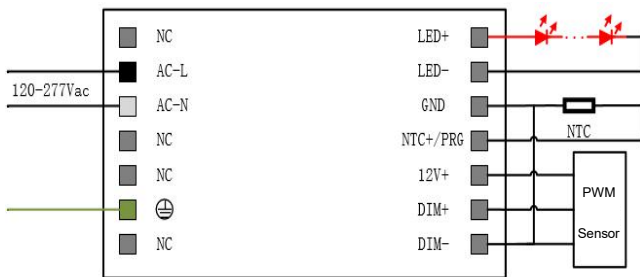

Wiring diagram of PWM sensor

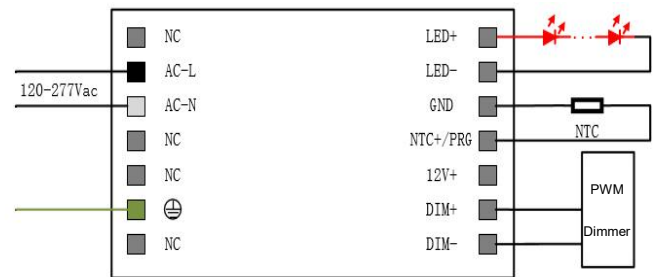


Wiring diagram of PWM dimmer


• PWM dimming instruction

- ① Connect PWM signal to DIM terminal
- ② Compatible signal range: 200-2000(Hz); high level: 9-10V, low level: 0-0.5V
- ③ Dimming depth: 1% (max. current)
- ④ DIM+/- (without signal connected): 100% rated current output

• PWM dimming curve

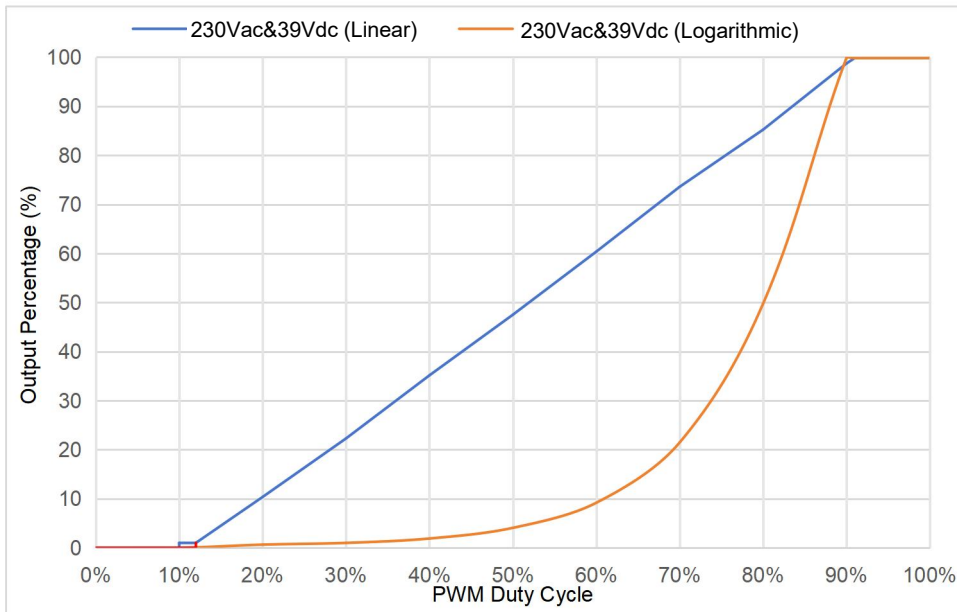

• Rx dimming function

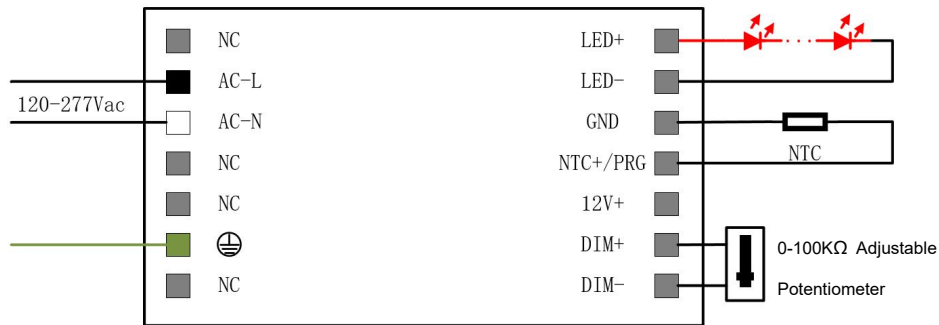

Wiring diagram of Rx dimmer

• Rx dimming instruction

① Connect Rx signal to DIM terminal

② Range: 0-100KΩ@U_o max&Ta=25℃

When it is 12KΩ±1KΩ, the light turns on; when it is 10KΩ±1KΩ, the light turns off.



③ Dimming depth: 1% (max. current)

④ DIM+/- (without signal connected): 100% rated current output

• **Over-temperature protection function**

External over-temperature protection can be set by Lifud programmer.

Recommended NTC: Vishay Part#:NTCS0805E3153GMT. (R25=15kΩ, B25/85=3700K)

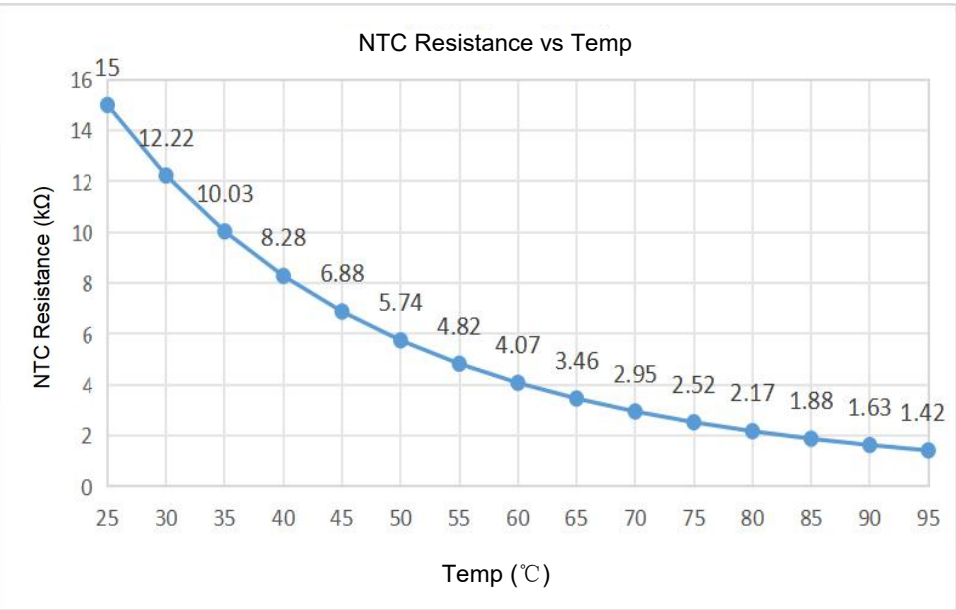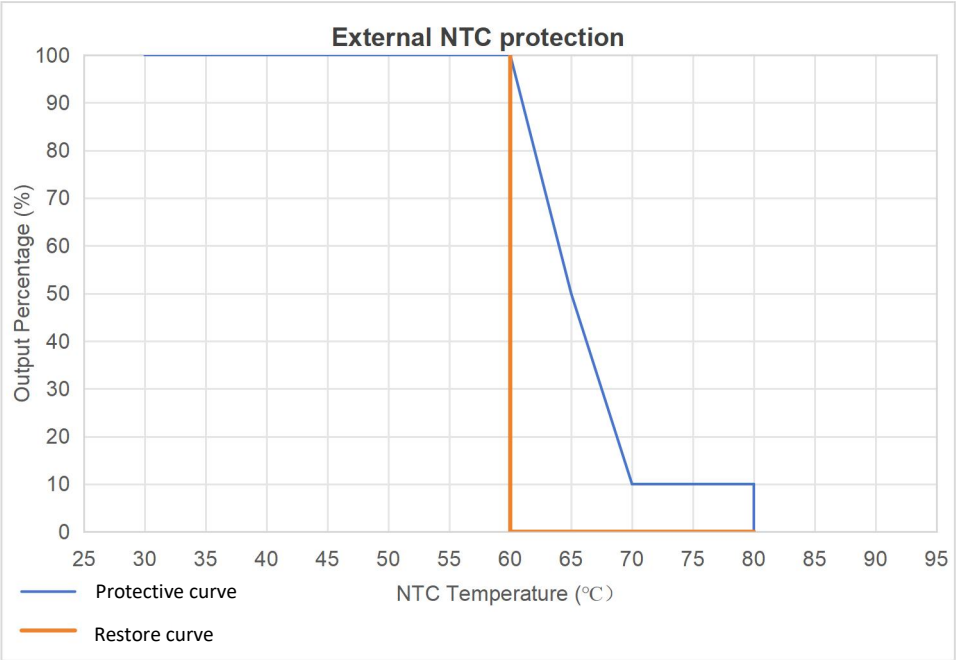

Configuration tools and software


Product	Name	Brand	Model	Software
	Lifud programmer	LIFUD	LF-SCS080C	Lifud SmartSet

Read/write and parameter configuration

Programming project	Default settings	Parameters settings	Read/Write
Production information	-	No	Read
Output current	1050mA (default)	Yes	Read/Write
Over-temperature protection	Activated	Yes	Read/Write
Dimming curve	Linear	Yes	Read/Write
CLO	OFF	Yes	Read/Write

Programmable function

① Lifud programmer

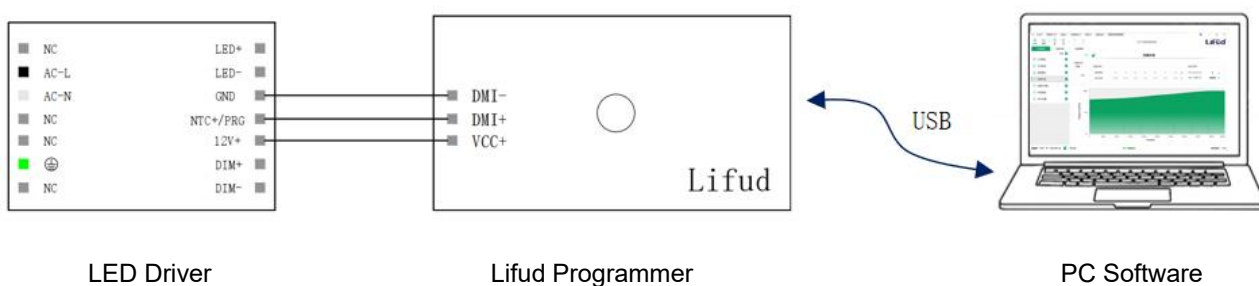

Certificates & standards

Approval marks – approval	UL, Class P, FCC, CE
Standards	UL 8750; CSA C22.2 no.250.13; FCC Part 15B; EN 61347-2-13; EN 61347-1; EN 55015; EN 61547; EN 61000-3-2; EN 61000-3-3; IEC61347-1; IEC61347-2-13;
Type of protection	IP20

Logistical data

Product	Packaging unit (Pieces/Unit)	Dimensions (L*W*H)	Volume	Gross weight
LF-GMD035YN	42	385mm*285mm*210mm	23.04dm³	9.06kg±5%

Test equipment & condition

Test equipment	AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.
-----------------------	---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25℃, humidity of 50%, full load and input voltage of 230Vac/50Hz.

Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
3. The number of LED drivers that can be connected to a circuit breaker and the inrush current are tested under the same conditions.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.
5. Lifud Technology Co., Ltd. reserves the right to interpret any content of this specification.

Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact on LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.